

Wrap up earlier with Enviroseal™

Enviroseal Wall Wrap provides a protective weather barrier that allows trades to work inside before the façade is constructed.

Wrapping a house with Enviroseal also protects against condensation build up reducing the risk of mould growth in walls.



Bradford™
enviroseal™

CSR

The Reverse Build™ Process with Enviroseal Wall Wrap

The reverse build process can help builders save time, reduce delays, and have greater flexibility and control over scheduling.

It allows builders to carry out internal works before the façade is constructed; electricians can rough-in, contractors can fit insulation and plasterers can carry out the internal fit-out.

The reverse build process can save critical time during construction by reducing delays caused by bad weather and the availability of façade trades such as bricklayers.

TWO-STOREY WRAPPING MADE EASY

Wrapping a two-storey house can be completed in less than a day with Bradford's patent pending RapidWrap scaffolding system. RapidWrap suspends from the bottom plate of a two-storey frame and allows wall wrap installers quick, easy and safe access to the second storey.



CUSTOM BUILDER BRANDED WALL WRAP

Bradford offers builders the option of branding Enviroseal Wall Wrap with their own logo. A clever outdoor advertising opportunity designed to promote the builder's brand during construction of every home they build.



*Minimum order quantities apply
- Please check with your Bradford Account Manager for more details.


FLEXIBLE SCHEDULING WITH THE REVERSE BUILD PROCESS

Typical Build Process Example

Wk 01	Site preparation
Wk 02	Slab
Wk 03	Frame and windows
Wk 04	Roof tiles/roof sheeting
Wk 05	Wall straightened/services rough-in
Wk 06	Typical delay – bricklayer unavailable
Wk 07	Typical delay – bricklayer unavailable
Wk 08	Brick work
Wk 09	Typical delay – bad weather
Wk 10	Brick work
Wk 11	Brick work
Wk 12	Electrical rough-in
Wk 13	Insulation batts installed
Wk 14	Internal fit-out
Wk 15	Internal fit-out
Wk 16	Internal fit-out
Wk 17	Build process continues

Reverse Build Process Example

Wk 01	Site preparation
Wk 02	Slab
Wk 03	Frame and windows
Wk 04	Roof tiles/roof sheeting
Wk 05	Wall straightened/services rough-in
Wk 06	WALL WRAP INSTALLED
Wk 07	Electrical rough-in
Wk 08	Insulation batts installed
Wk 09	Internal fit-out
Wk 10	Internal fit-out
Wk 11	Internal fit-out
Wk 12	Build process continues
Wk 13	Build process continues
Wk 14	Build process continues
Wk 15	Build process continues
Wk 16	Build process continues
Wk 17	Build process continues

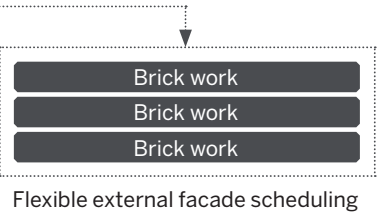

CSR Bradford
Locked Bag 1345 North Ryde BC NSW 1670
Email: bradfordenquiries@csr.com.au

CSR Bradford is a business division of CSR Building Products Limited ABN 55 008 631 356

The contents of this brochure are copyright protected and may not be reproduced in any form without prior written consent of CSR Bradford. Recommendations and advice regarding the use of the products described in this brochure are to be taken as a guide only, and are given without liability on the part of the company or its employees. We reserve the right to change product specifications without prior notification, please refer to the CSR Bradford website for the latest revision of this document. The purchaser should independently determine the suitability of the product for the intended use and application.

WANT TO KNOW MORE?

Ask your representative or call CSR Bradford on **1300 850 305** or to download product and technical information visit **bradfordinsulation.com.au**



Don't
let bad
weather
cause
delays

