

Defend Against Condensation, Protect Against Water Damage.

Enviroseal HTS – Vapour Permeable Roof Sarking



Bradford Enviroseal HTS

THE RISK OF CONDENSATION

Condensation can be a damaging force inside the roof and is caused when water vapour generated inside the home rises up into the roof cavity and comes into contact with the cold roof assembly. If liquid water forms underneath tile or metal sheet it can drip back down onto the ceiling potentially damaging insulation, staining plasterboard, or even be absorbed by the timber frame leading to serious mould growth.

Bradford Enviroseal HTS helps protect your customer's home by minimising condensation risk and weather related water entry into the roof space.


WITHOUT BRADFORD ENVIROSEAL HTS

Water vapour condenses on the underside of the cold roof assembly and can drip back down onto the ceiling.




WITH BRADFORD ENVIROSEAL HTS

Water vapour easily passes through the Enviroseal HTS and condenses on the underside of the cold roof assembly and safely drains out into the gutter.

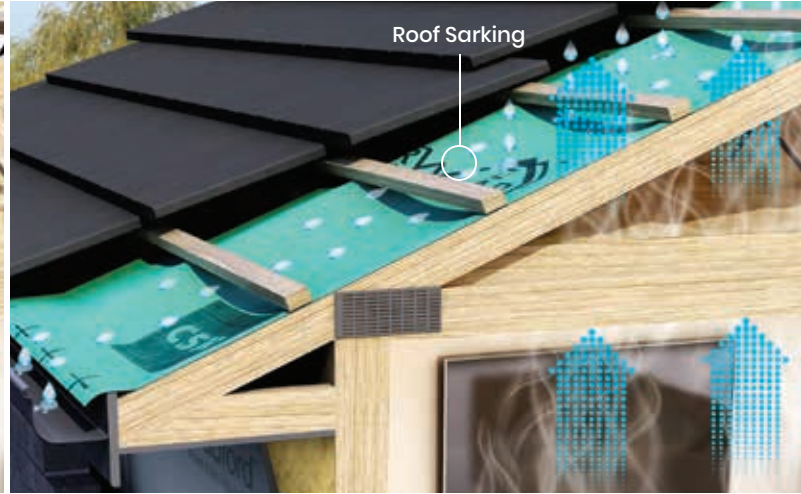

The Benefits of Enviroseal HTS

Minimise Risk of Condensation



VAPOUR
BARRIER
LOW

HTS is classified as a Class 4 Vapour Permeable Roof Sarking in accordance with AS/NZS 4200.1:2017 and is the ideal way to protect against condensation related damage in residential homes.

A Tough Weather Barrier



WATER
BARRIER
HIGH

Enviroseal HTS helps prevent water ingress caused by wind driven rain into the roof space. HTS is classified as a Water Barrier in accordance with AS/NZS 4201.4, meaning it can help minimise weather related damage to the home.

Compatible Under Tile and Metal Roofs



MEDIUM
DUTY

HTS is a Medium Duty Roof Sarking making it suitable for installation under Tiled roofs with $\leq 600\text{mm}$ spans or Metal roofs with $\leq 900\text{mm}$ spans.

Suitable for BAL zones 12.5 to 40



LOW ≤ 5
BAL SUITABLE

HTS has achieved a Flammability Index of Low <5 in accordance with AS 1530.2 making it suitable for use in BAL regions.

Available with Integrated Tape

Bradford Enviroseal is also available with an integrated tape release liner that allows for simple, easy sealing on site without the need for handling other rolls of tape.

PRODUCT INFORMATION

Description	Width (mm)	Length (m)	m ² per Roll (m)	Weight (kg)	Product Code
Enviroseal HTS	1500	30	45	8.2	185381
Enviroseal HTS - IT	1500	30	45	8.5	190904

For more information contact CSR Bradford on **1300 850 305** or visit bradfordinsulation.com.au



CSR Bradford Locked Bag 1345 North Ryde BC NSW 1670
bradfordinsulation.com.au



CSR Bradford is a business division of CSR Building Products Limited ABN 55 008 631 356

The contents of this brochure are copyright protected and may not be reproduced in any form without prior written consent of CSR Bradford. Recommendations and advice regarding the use of the products described in this brochure are to be taken as a guide only, and are given without liability on the part of the company or its employees. We reserve the right to change product specifications without prior notification, please refer to the CSR Bradford website for the latest revision of this document. The purchaser should independently determine the suitability of the product for the intended use and application.