

GLASSWOOL MULTITEL

18kg/m³

Introduction

Bradford Multitel is used for external insulation on HVAC ductwork.

Product Description

Bradford Multitel is manufactured in Australia from an engineered glasswool insulation blanket typically faced with a reinforced foil. The blanket is manufactured by spinning molten glass, containing up to 80% recycled content, into fine wool like fibres. These are bonded together using a thermosetting resin. The product can be identified by its golden appearance.

Applications

Multitel is a versatile flexible insulation material that is designed for the economic external insulation of heating, ventilating and cooling ductwork. Multitel comes in a range of thicknesses that meet the performance requirements as set out by the Building Code of Australia. Typical HVAC applications include;

- Offices
- High rise
- Hospitals
- Shopping centres etc
- Glasswool Multitel is fixed externally to duct work.

Benefits

- Lightweight insulation
- Can be easily handled
- Meets BCA performance requirements
- Easily forms the shape of the duct to be insulated
- Helps meet the energy efficiency requirements of the BCA
- Provides both energy and cost savings
- Biosoluble material – safe to use
- Approved for use on site by the Unions

Available Facings

Standard factory applied facings are available. Various grades of Thermofoil as well as black or plain glass tissue can be adhered to Multitel to meet needs of various application. Please contact your nearest Bradford sales office with your requirements.

Health and Safety

This product is manufactured to the latest Fibre Bio-Soluble (FBS-1) Glasswool formulation and is not classified as hazardous according to the criteria of the ASCC (formally NOHSC) guidelines. For further information refer MSDS sheet on Bradford website.

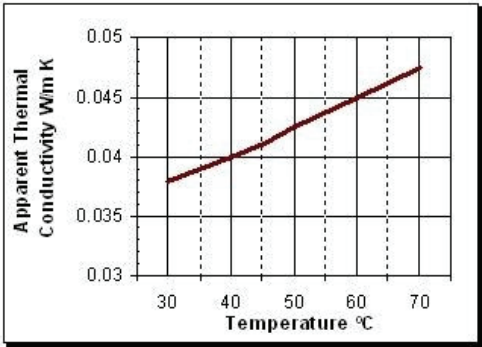
SKU Table

Base Blanket Material R-Value	Nominal Thickness (mm)	Nominal Length (m)	Nominal Width (mm)	Nominal Coverage (m ²) per Roll	Nominal Pack Weight (kg)
R0.6	25	15	1200	18	8.10
R1.0	38	15	1200	18	12.31
R1.3	50	10	1200	12	10.80
R1.5	55	10	1200	12	11.88
R2.0	75	7.5	1200	9	

GLASSWOOL MULTITEL

18kg/m³

Physical Properties

Density	kg/m ³	18
Maximum Service Temperature		Glasswool: 350°C
Thermal Conductivity	Based on measurements made in accordance with AS2464:5 and AS2464:6	
Fire Hazard Properties	When tested in accordance to AS/NZS 1530.3:1999	<ul style="list-style-type: none"> • Ignitability: 0 • Spread of flame: 0 • Heat Evolved: 0 • Smoke Developed: 1
Corrosion Resistance	When tested in accordance with BS 3958.5:1969	pH 7.5-8.0
Moisture Absorption	When left in a controlled atmosphere of 50°C and 95% relative humidity for four days	Less than 0.2% by volume
AS4859 Compliance	Complies with AS/NZ4859.1 "Materials for the thermal insulation of buildings"	Complies
Sample Specification		The insulation material shall be Bradford Multitel Glasswool of thickness () mm faced with (Specify facing). For installation specifications refer to the relevant Application Brochure in the Bradford Insulation Building Literature series.



CSR Bradford
39 Delhi Road, North Ryde NSW 2113
Telephone (02) 9765 7000 Facsimile (02) 9765 7002

www.bradfordinsulation.com.au

CSR Bradford Insulation is a business division of CSR Building Products Limited ABN 55 008 631 356

The contents of this brochure are copyright protected and may not be reproduced in any form without prior written consent of CSR Bradford Insulation. Recommendations and advice regarding the use of the products described in this brochure are to be taken as a guide only, and are given without liability on the part of the company or its employees. We reserve the right to change product specifications without prior notification, please refer to the Bradford website for the latest version of this document. The purchaser should independently determine the suitability of the product for the intended use and application.

